Kirby Morgan Dive Systems, Inc.®



1430 Jason Way Santa Maria, California 93455 Phone: 805/928-7772 Fax: 805/928-0342 www.KirbyMorgan.com email: kmdsi@KirbyMorgan.com

Part #525-322 SuperLite[®] 17C Helmet Spares Kit

| PART # | DESCRIPTION | QTY | PART # | DESCRIPTION | QTY |
|---------|---------------------------------|-----|---------|---------------------------------|-----|
| 510-008 | O-ring | 2 | 510-724 | Low Volume Oral | 1 |
| 510-010 | O-ring | 1 | 010 721 | Nasal Mask | |
| 510-260 | O-ring, View Port | 1 | 510-747 | Oral Nasal Mask | 1 |
| 510-450 | O-ring, Neck Ring | 1 | 510-754 | Head Cushion Assembly | 1 |
| 510-490 | O-ring | 1 | 525-309 | Regulator Rebuild Kit | 1 |
| 510-550 | Valve, Oral Nasal | 1 | 525-311 | Side Block Rebuild Kit | 1 |
| 510-561 | Valve, Water Dump, Black | 1 | 525-745 | Head Cushion Foam Spacer Kit | 1 |
| 510-575 | Pad, Nose Block | 1 | 525-759 | Quad Valve Exhaust Kit | 1 |
| 510-631 | Neck Dam, Latex Small-Medium | 1 | 530-035 | Screw | 2 |
| | | | 530-040 | Screw | 2 |
| 510-683 | Chin Cushion | 1 | 530-045 | Screw | 2 |
| | | | 550-061 | Spacer | 2 |

*See back page for O-ring Identification

O-rings should be lightly lubricated with food grade silicone Dow Corning^{*} 111 or equivalent in accordance with the operations and maintenance manual. Christo-Lube^{*} may also be used. At a minimum, all helmet or BandMask^{*} O-rings should be replaced at least once a year in accordance with the A2.1 checklist for the helmet or mask being inspected. During daily and monthly maintenance, O-rings and valves may be reused providing no damage or deformation is found. O-rings and valves may require replacement more often than yearly if the helmet or mask use is extreme, or if the helmet or mask is used in waters containing oil or chemical contamination. Daily cleaning and inspections as well as performing the monthly inspection (A2.2 checklist) will identify the need more accurately than simply placing a number of hours between overhaul. Store spare O-rings, valves and soft goods in a cool, dark, dry place. Avoid prolonged exposure to temperatures above 90 degrees Fahrenheit and/or exposure to ultra violet rays. Do not lubricate exhaust valves. Lubricating valves can cause dirt to stick, allowing leakage.

A CAUTION


Use only KMDSI original replacement parts. The use of other manufacturers' parts will interfere with the performance characteristics of your life support equipment and may jeopardize your safety. Additionally, any substitutions will void any warranties offered by KMDSI. When ordering spares, always insist on Kirby Morgan Genuine Parts.

> Keepy Morcan[®] Genuine Parts

Kirby Morgan Dive Systems, Inc.[®] 1430 Jason Way Santa Maria, California 93455

1430 Jason Way Santa Maria, California 93455 Phone: 805/928-7772 Fax: 805/928-0342 www.KirbyMorgan.com email: kmdsi@KirbyMorgan.com



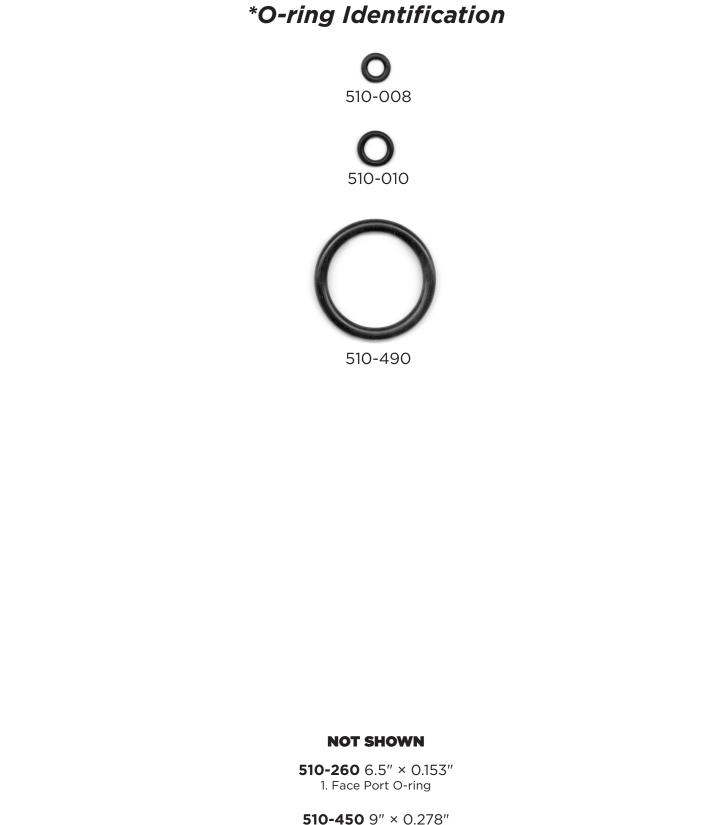

1**0-450** 9″ × 0.278 1. Neck Ring O-ring

