



# Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmdsi@KirbyMorgan.com

## Part #525-211

### Sealed Pull Pin Overhaul Kit (For 2× 505-110 Pull Pins)

#### Tools and components required:

- ¼" Allen Wrench
- Loctite® 248
- Nylon Tube Brush
- Block Of Wood

Approximately 2" × 4" × 8" with a Half Inch Diameter Hole in the Center ⅜" to ½" Deep. *See Figure 1*

- ½" Wooden Dowel
- Access To Clean Fresh Water Clean Rags/Paper Towels
- Mild Hand Washing Dish Soap Or Simple Green®
- Latex or rubber gloves

#### Parts Included

Part #	Description	Qty	Part #	Description	Qty
510-008	O-ring	2	520-270	Syringe	2
510-112	O-ring	6	530-110	Locknut	2
520-008	Silicone Oil	6g			

### ⚠ CAUTION

**Overhauling the Sealed Pull Pins requires the use of the proper tools and components. Only use the type of silicone oil contained in this kit. Do not substitute O-rings. The red silicone O-rings swell after contact with the silicone oil. The use of the silicone O-rings allows for better sealing than rubber compounds because the silicone rubber swells after being in contact with the silicone oil.**

The 505-110 Sealed Pull Pins used on KMDSI helmets work extremely well and have shown to be very reliable with only minimal maintenance. The reliability stems from the Pull Pins being filled with silicone oil and sealed with O-rings. The silicone oil allows smooth hydraulic operation while preventing sand and debris from entering the sleeve. Under mild conditions the Pull Pins will operate for one to two years before the sliding surfaces start to wear the O-rings, allowing oil leakage to occur and eventually resulting in stiff operation. Diving in salt water with minimal rinsing, as well as welding, burning and especially jetting, will cause accelerated wear of the O-rings and possible corrosion of the Pull Pin components. Once the surface chrome on the pull knob has worn away due to corrosion /electrolysis, the Pull Pins will require disassembly and overhaul more frequently, usually every year to 18 months. If the Pull Pins have had water intrusion resulting in excessive corrosion of components, the effected components will need to be replaced. Until recently, overhaul of Pull Pins was only accomplished by KMDSI. This overhaul procedure was written to better serve the end user and guide KMDSI technicians in the overhaul of the Pull Pins. Technical questions regarding this procedure should be addressed to KMDSI or Dive Lab.

*Pre and post dive inspections are recommended and will help with the detection of excessive wear or corrosion.*

### ⚠ CAUTION

**Use only KMDSI original replacement parts. The use of other manufacturers' parts will interfere with the performance characteristics of your life support equipment and may jeopardize your safety. Additionally, any substitutions will void any warranties offered by KMDSI. When ordering spares, always insist on Kirby Morgan Genuine Parts.**

# Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmddsi@KirbyMorgan.com



## Preparation (*numbers in parenthesis refer to BlowApart on page 6*):

1. Drill a ½" diameter hole by ½" deep in the center of a 2" × 4" piece of wood approximately eight inches long and set aside. The 2" × 4" makes a good working base and helps keep the Pull Pin from moving during assembly.

2. Drill a ¼" diameter hole approximately ½" deep in one end of the wooden dowel. The dowel is used to seat the P/N 510-008 O-ring in the Pull Pin knob. It is also useful when inserted in the hole in the 2" × 4" when filling the pull pin casing with oil.



*Figure 1*

## Disassembly:

**NOTE:** Sealed Pull Pins made prior to 2003 used a ¼" locknut. There is no reason other than putting an older helmet back into service where one would encounter a ¼" locknut.

Fiberglass helmet retaining screws are located on the top of the helmet ring. Stainless steel helmet retaining screws are located on the bottom of the helmet ring

**Preparation:** Disassembling the pull pin should be done over a large paper cup or suitable container to capture oil and associated parts of the pull pin.



1. Using the ¼" Allen wrench remove Pull Pin retaining screw and remove the Pull Pin from the helmet ring.

2. Hold the knob (4) end of the pull pin while using the ⅜" nut driver to loosen and remove the lock nut (1).

3. Pull the knob (4) free, then slide the plunger (8) free from the body (6).

4. Remove and separate all associated parts. Dispose of all three O-rings and locknut.





# Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmdsi@KirbyMorgan.com

5. Clean all parts with a nylon brush using a solution of mild soap and water then thoroughly rinse with clean fresh water and dry. Clean inside of body with nylon brush to remove debris and corrosion.

6. Inspect the Pull Pin body (6), slide surfaces, knob (4), spring (7) and plunger (8) for corrosion damage.


**NOTE:** Corroded parts can be soaked in a solution of 5% percent white vinegar and water for up to one hour. Any parts showing damage from excessive corrosion that could weaken the component or not allow the O-rings to seal must be replaced. Additionally, if the threaded area on the piston is damaged the piston should be replaced.

## Reassembly and Filling:

**NOTE:** New silicone sealing O-rings must be used on the piston and knob. O-rings that have been in contact with silicone oil become very soft and will usually tear or chip during assembly.

### DO NOT PRE-LUBRICATE THE O-RINGS

1. Install the two new red O-rings (5), one on the plunger (8), one on the knob (4) and set aside.

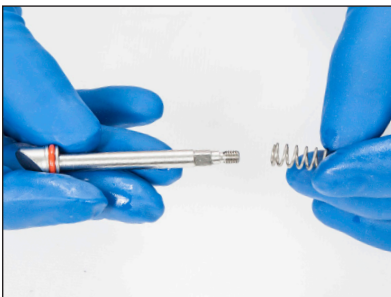

2. Slide spring (7) onto plunger (8) and set aside.

3. Carefully install the knob (4) into the body (6), making sure not to pinch the O-ring. Ensure the index tab on the knob aligns with the recess on the body (6).




4. Orient the pull pin body so the index is facing you. With one finger on the knob (4) and the spring on the plunger (8), place the plunger assembly into the body (6) so that you can see the beveled end of the plunger. It will be in line with the index recess.

# Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmcsi@KirbyMorgan.com

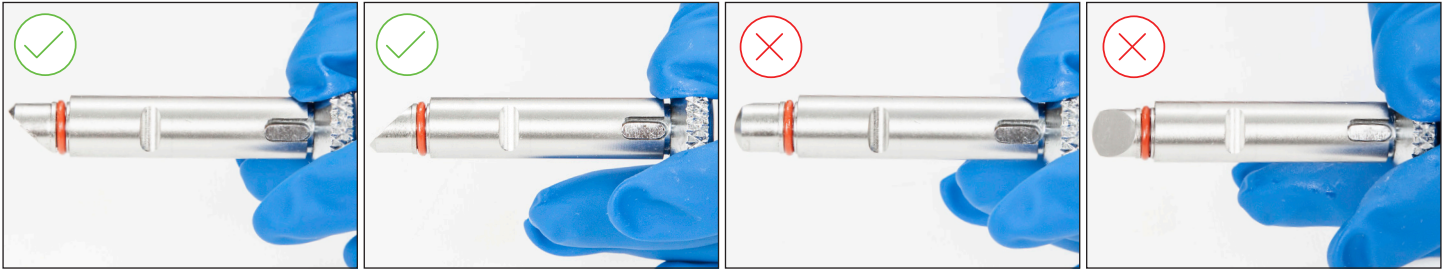

5. Place the black O-ring (3) over the threaded plunger and using the dowel with the hole, press the O-ring into the knob recess around the threaded plunger. Ensure the black O-ring is in the recess formed by the threaded plunger and the groove in the pull knob. The threaded plunger protrudes just enough to get the nut on the threaded shaft approximately one turn.



**NOTE:** Thread the nut only about one turn so that the knob end is sealed for filling with oil. This will leave a small opening between the body and plunger for filling on the opposite end using the syringe. The washer (2) will not be used at this time.

## **Preparation**

6. Insert the wooden dowel (hole end up) into the hole found on the 2" x 4".



7. Place the knob (4) end of assembly onto wooden dowel. With your hands on the body (6) slightly push down to create a small gap at the plunger end of pull pin.

8. Fill Pull Pin with oil from the plunger end, use half the amount of oil contained in one of the provided syringes and do not fill to the top of the pull pin body. The remaining oil and syringe may be either stored or used in a second Pull Pin.





# Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmgsi@KirbyMorgan.com

**NOTE:** If the body gets completely filled, you will need to dump out approximately 5–8 drops.

9. Slightly push down on the beveled end of the plunger as you lift the assembly away from the wooden dowel. Keep the Pull Pin in a vertical orientation.



10. Using the  $\frac{3}{8}$ " nut driver, slowly tighten the nut and draw the O-ring at the beveled end into the body. The red O-ring will no longer be visible.

11. Keep one finger on the plunger end while turning the pull pin 180 degrees so the knob (8) is now at the top and the plunger at the bottom positions.



12. Remove lock nut using  $\frac{3}{8}$ " nut driver and install washer (2).

13. Place lock nut back onto threaded end of plunger and use the  $\frac{3}{8}$ " nut driver to tighten until nut bottoms out.

14. Wipe any excess oil from the Pull Pin and test the Pull Pin to ensure the pin moves smoothly and does not bind. If the Pull Pin does not pull out smoothly and does not snap back when released, disassemble, inspect all parts and try again until proper operation is achieved.

# Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455


Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmcsi@KirbyMorgan.com



15. Reinstall Pull Pin into the helmet. Tighten the Allen screw into the bottom ring and tighten until it is just flush and has bottomed in the counter bore. If the original screws are being reused apply a small amount of Loctite® 248 onto the ends of the screws.

**NOTE:** If any part of the red O-ring at the beveled end is visible, this is an indication that too much oil is in the body. If this is the case, carefully redo steps 2–14.

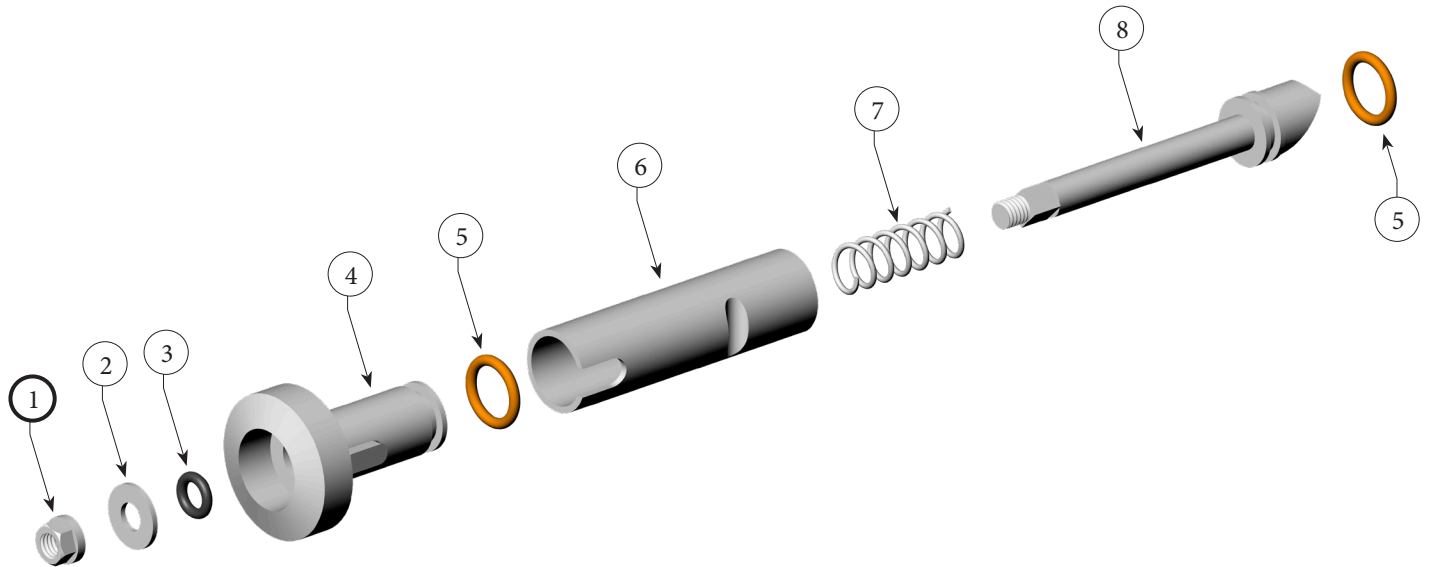

Location #	Part#	Description	Location #	Part#	Description
1	530-110	Locknut	5	510-112	O-ring
2	330-510	Washer	6	550-238	Body
3	510-008	O-ring	7	535-815	Spring
4	550-236	Knob	8	550-240	Plunger



*This page intentionally left blank.*



Kirby Morgan Dive Systems, Inc.  
1430 Jason Way  
Santa Maria, CA 93455, USA  
Telephone (805) 928-7772, FAX (805) 928-0342  
E-Mail: [KMDSI@KirbyMorgan.com](mailto:KMDSI@KirbyMorgan.com), Web Site: [www.KirbyMorgan.com](http://www.KirbyMorgan.com)