



Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmdsi@KirbyMorgan.com

Part #525-363 SL 17C, 17K and KM 37 Soft Goods Overhaul Kit

PART #	DESCRIPTION	QTY	PART #	DESCRIPTION	QTY
310-003	O-ring	1	510-561	Valve, Water Dump, Black	1
510-007	O-ring	4	510-580	Seat, Inlet Valve	1
510-008	O-ring	2	510-776	Exhaust Valve	2
510-010	O-ring	3	520-024	Packing	1
510-011	O-ring	2	520-030	Washer	1
510-012	O-ring	1	520-031	Washer	1
510-014	O-ring	1	520-032	Washer	1
510-015	O-ring	1	520-033	O-ring, Teflon®	1
510-029	O-ring	1	520-042	11" Tie-Wrap	4
510-033	O-ring	2	520-167	Teflon® Washer for Swing Catch	1
510-260	O-ring, View Port	1	525-032	Kit, Whisker Clamp Replacement	1
510-401	Gasket	1	525-330	Kit, One-Way Valve	1
510-450	O-ring, Neck Ring	1	530-028	Nut	1
510-481	O-ring	1	530-303	Lock Nut	1
510-483	O-ring	1	530-601	Retaining Pin	1
510-490	O-ring	2	540-095	Packing Washer	1
510-550	Valve, Oral Nasal	1			
510-552	Exhaust Valve	1			
510-553	Diaphragm	1			

***See next page for O-ring Identification**

O-rings should be lightly lubricated with food grade silicone Dow Corning® 111 or equivalent in accordance with the operations and maintenance manual. Christo-Lube® may also be used. At a minimum, all helmet or BandMask® O-rings should be replaced at least once a year in accordance with the A2.1 checklist for the helmet or mask being inspected. During daily and monthly maintenance, O-rings and valves may be reused providing no damage or deformation is found. O-rings and valves may require replacement more often than yearly if the helmet or mask use is extreme, or if the helmet or mask is used in waters containing oil or chemical contamination. Daily cleaning and inspections as well as performing the monthly inspection (A2.2 checklist) will identify the need more accurately than simply placing a number of hours between overhaul. Store spare O-rings, valves and soft goods in a cool, dark, dry place. Avoid prolonged exposure to temperatures above 90 degrees Fahrenheit and/or exposure to ultra violet rays. Do not lubricate exhaust valves. Lubricating valves can cause dirt to stick, allowing leakage.



Kirby Morgan Dive Systems, Inc.®

1430 Jason Way Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.KirbyMorgan.com email: kmcsi@KirbyMorgan.com



310-003

1. Low Pressure Side Block Port Plug (*Bottom*) (Qty. 1)



510-007

1. Water Dump Adapter Cover (Qty. 2)



510-008

1. Nose Block Shaft (Qty. 2)



510-010

1. Nose Block Guide Seal (Qty. 1)
2. Steady Flow (Qty. 1)



510-011

1. Regulator Adjustment Knob (Qty. 1)



510-012

1. Bent Tube (Qty. 1)



510-014

1. Regulator Inlet Nipple (Qty. 1)




510-015

1. Bonnet Nut for Steady Flow (Qty. 1)



510-029

1. Comm Port (Qty. 2)

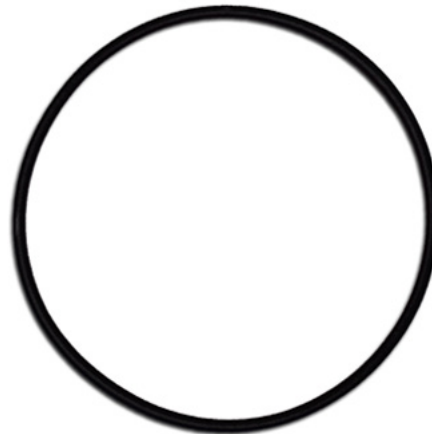

510-033

1. Quad Exhaust Cover (Qty. 1)



510-481

1. Comm Packing Gland (Qty. 1)



510-483

1. One Way Valve Mounting O-ring (Qty. 1)



510-490

1. Regulator Mount Nut (Qty. 1)



520-033

1. Bent Tube (Qty. 1)

NOT SHOWN

510-260 6.5" × 0.153"

1. Face Port O-ring

510-450 9" × 0.278"

1. Neck Ring O-ring

